

# ALUMIL

## SMARTIA M15000




### HINGED TILT & TURN SYSTEM NOT INSULATED



SMARTIA M15000 is a Tilt & Turn system which can meet a multiple needs thanks to a wide range of profiles for windows and doors with the following characteristics:

- Basic system depth 50mm
- Glass thickness up to 47mm and sash weight up to 130Kg
- Robust & flexible system that can support all potential typologies of hinged doors, windows & pivot windows
- Available special profiles for main entrances, smoke proof doors and panic doors
- The system also supports “block window” constructions (concealed sash)
- Various designs (e.g. flat, curved, classic)
- Either European groove or PVC groove hardware can be applied
- Certified performance by the IFT Rosenheim Institute




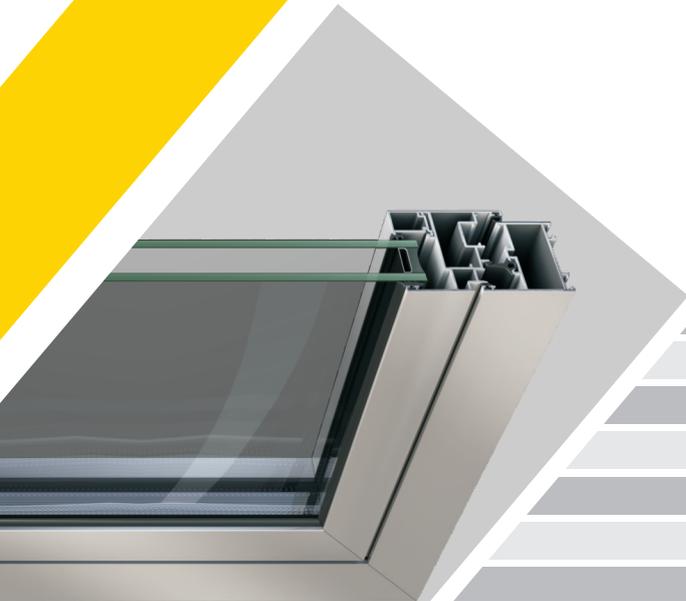

### TECHNICAL CHARACTERISTICS

Visible aluminium face width	137 mm
Frame height	48 mm
Frame width	50 mm
Sash height	66 mm
Sash width	59 mm
Max. sash weight	up to 130 Kg
Glazing	up to 47 mm

### TYOLOGIES

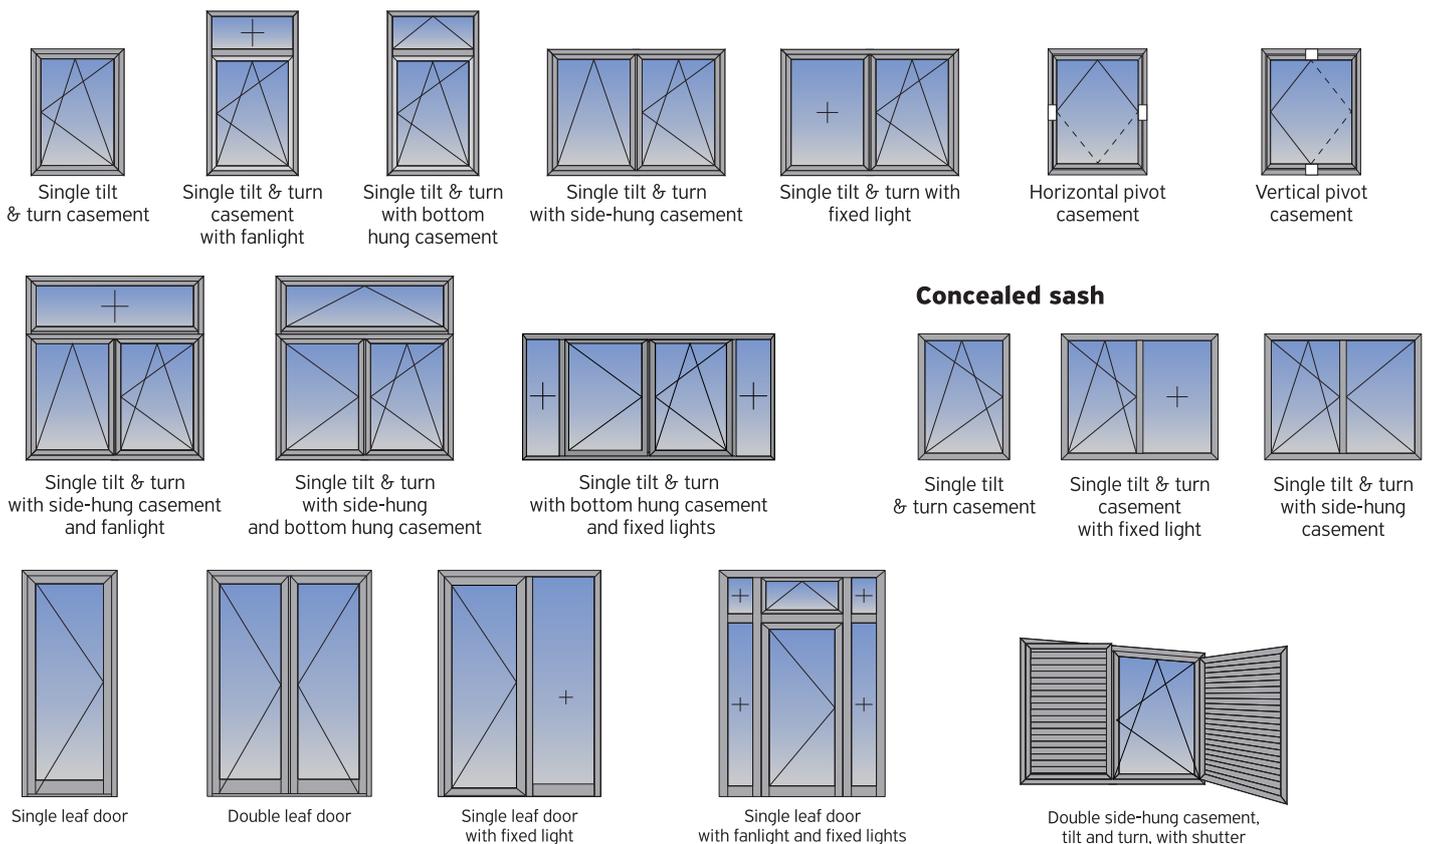

### CERTIFICATES

	Air permeability EN 1026, EN12207	CLASS 4
	Watertightness EN 1027, EN 12208	E1050
	Resistance to wind load EN 12210, EN 12211	CLASS C5
	Burglar resistance EN 1627-1630	WK2

**ALUSMART**  
51 FURNISS ROAD  
DARCH WA 6065  
TEL: 1800 ALUSMART  
[www.alusmart.com.au](http://www.alusmart.com.au)

**ALUMIL SA**  
KILKIS INDUSTRIAL AREA  
GR 61 100, KILKIS  
TEL: +30 23410 79300  
FAX: +30 23410 71988  
[www.alumil.com](http://www.alumil.com)