




The S650 Automatic system is the S650 series version with electric motion. The elegant design and the superiority of the electric motion make it the perfect solution for constructions that require wide spans, perfect functionality and comfort, without restricting the view to residents.

The innovative design of the profiles of S650 electric version in combination with the concealed mechanism ensures the smooth motion of the system with emphasis on safety and functionality.

- Main characteristic of the system the concealed profiles as they are totally integrated into the wall.
- Remote controlled electric motion for ease of use.

- Central control motion sensor, locking, fire and trapped through cache circuit board (PCB) for maximum security.
- Narrow interlocking profile with only 25 mm visible aluminum face width.
- Operates in cases of blackout thanks to a battery included in the mechanism.
- Low threshold specially designed for installations flush to the floor
- Easy installation/removal of the sash in case of maintenance or replacement.

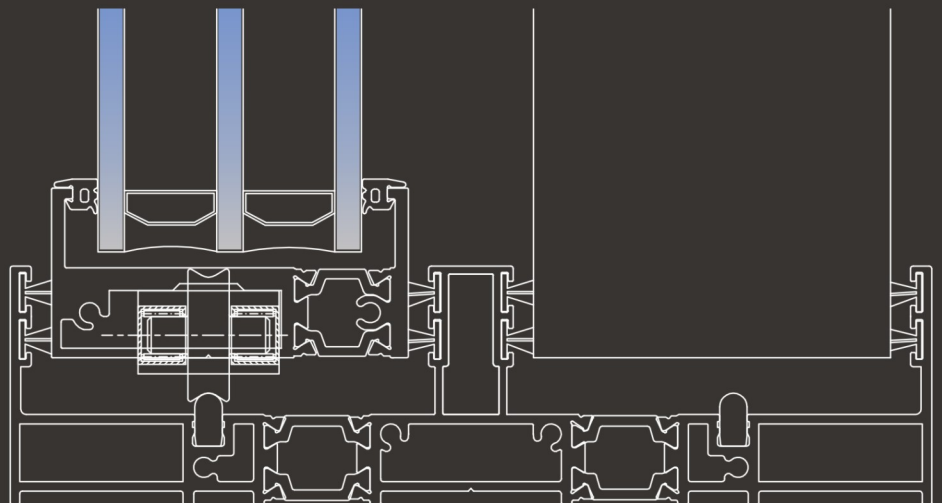


automatic S650

TECHNICAL CHARACTERISTICS




Visible aluminium face width	55 mm
Frame height	45 mm
Frame width	174 mm
Sash height	25 / 32 mm
Sash width	67,4 mm
Interlocking profile width	25 mm
Sash weight	Up to 700 kg
Glazing	50 mm
Insulation	Polyamides, PVC


TYOLOGIES




Double horizontal sliding sash




Single sliding sash with fixed light




Four horizontal sliding sashes with meeting stile



Double horizontal sliding sash meeting stile with fixed lights



Corner typology with four sliding sashes



Corner typology with two sliding sashes and fixed lights

ALUSMART

51 FURNISS ROAD
DARCH WA 6065
TEL: 1800 ALUSMART
www.alusmart.com.au

ALUMIL SA

ΒΙ.Π.Ε. ΚΙΛΚΙΣ
Τ.Κ. 61 100
ΤΗΛ: 23410 79300
FAX: 23410 71988
www.alumil.com