

ALUMIL

SUPREME S650 Phos




SLIDING INSULATED SYSTEM

ALUMIL's sliding thermal insulating system S650 is the ideal solution for wide spans with extensive glazing surfaces that offers elegant constructions with high functionality, performances and minimal architectural design.

The system's main advantage is the improvement of living conditions by maximizing the natural lighting and minimizing the visible aluminum face width, which makes the residents feel closer to the external environment and increase their sense of freedom.

- All the aluminum profiles are totally concealed in wall maximizing natural lighting in the buildings.
- Only 25 mm visible aluminium face width at the interlocking profile.
- Special anti-distortion fiberglass reinforced polyamides at the sash profile for avoiding possible malfunctions due to high temperature differences and for remarkable thermal insulation.
- Extra concealed profiles available for water drainage.

- Stainless steel rollers for smooth sliding & maximum functionality with high tolerance in corrosion.
- Special profiles for the implementation of multi-sash typologies.
- Exceptional solution, ideal for floor mounted installation.

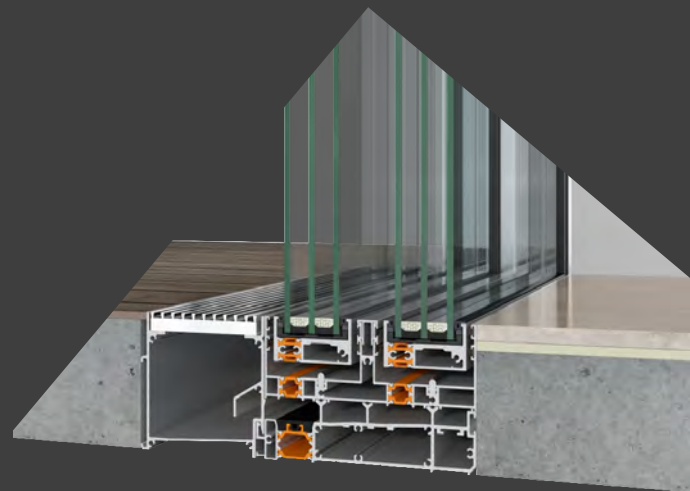





TECHNICAL CHARACTERISTICS

Visible aluminium face width	Concealed profiles
Frame height	59 mm
Frame width	164 mm
Sash height	22 / 32 mm
Sash width	62 mm
Interlocking profile width	25 mm
Sash weight	Up to 600 kg
Glazing	45 mm
Insulation	Polyamides, PVC


TYOLOGIES




Double horizontal sliding sash




Single sliding sash with fixed light




Four horizontal sliding sashes with meeting stile




Double horizontal sliding sash meeting stile with fixed lights




Corner typology with four sliding sashes



Corner typology with two sliding sashes and fixed lights







Triple horizontal sliding sash



Four horizontal sliding sashes

CERTIFICATES

	Air permeability EN 1026, EN12207	CLASS 4
	Watertightness EN 1027, EN 12208	CLASS 9A
	Resistance to wind load EN 12210, EN 12211	CLASS C2
	Thermal Insulation EN 10077-2	$U_w = 1,1 \text{ W/m}^2\text{K}^*$

* For window's dimensions 5,00 m x 2,50 m

ALUSMART

51 FURNISS ROAD
DARCH WA 6065
TEL: 1800 ALUSMART
www.alusmart.com.au

ALUMIL SA

KILKIS INDUSTRIAL AREA
GR 61 100, KILKIS
TEL: +30 23410 79300
FAX: +30 23410 71988

www.alumil.com